Wall and Ceiling Mount J-Hook, 25 Pack

INSTALLATION INSTRUCTIONS

5 FT. MAX.

Place up to 5 Ft. maximum apart to limit sagging.

Note: Screws are not included
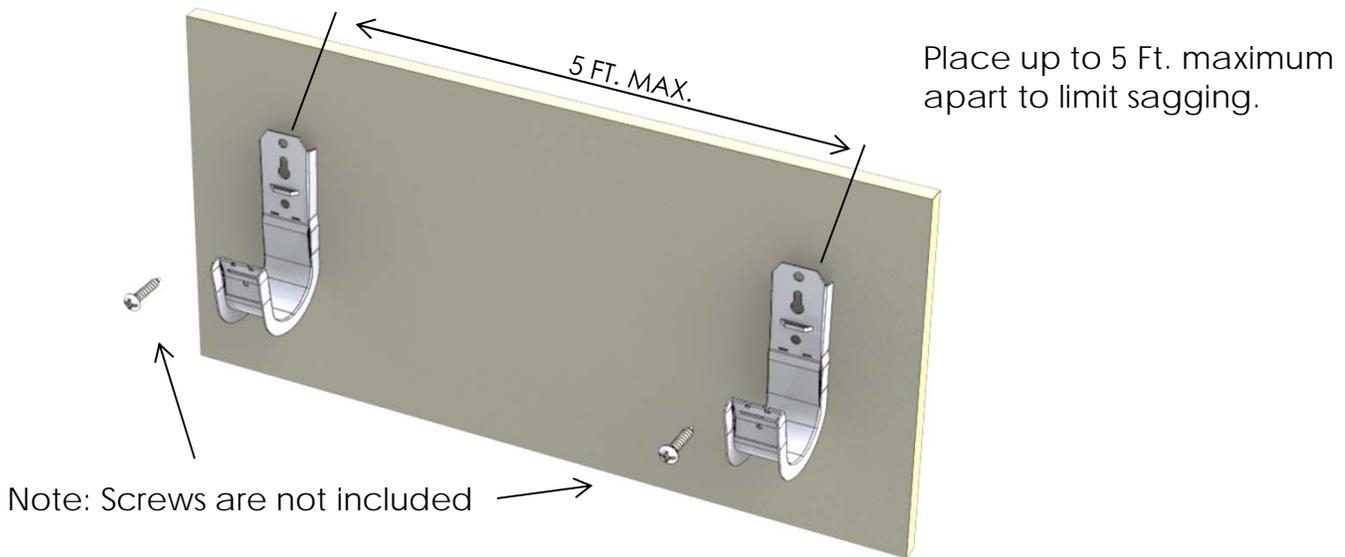
Angled version can be installed under ceiling.

Cable Sag
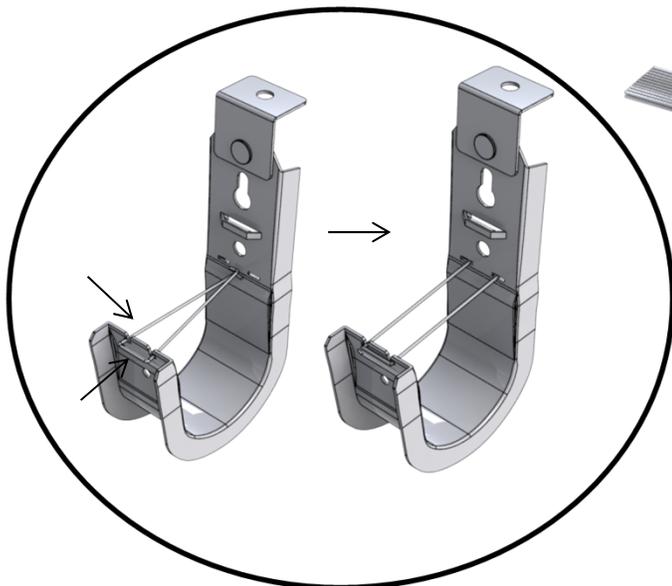
Retainer Clips is included with 2″ and 4″ J-Hooks.

¾″ & 1 5/16

2″ & 4″

J-Hook supports Velcro and cable ties.

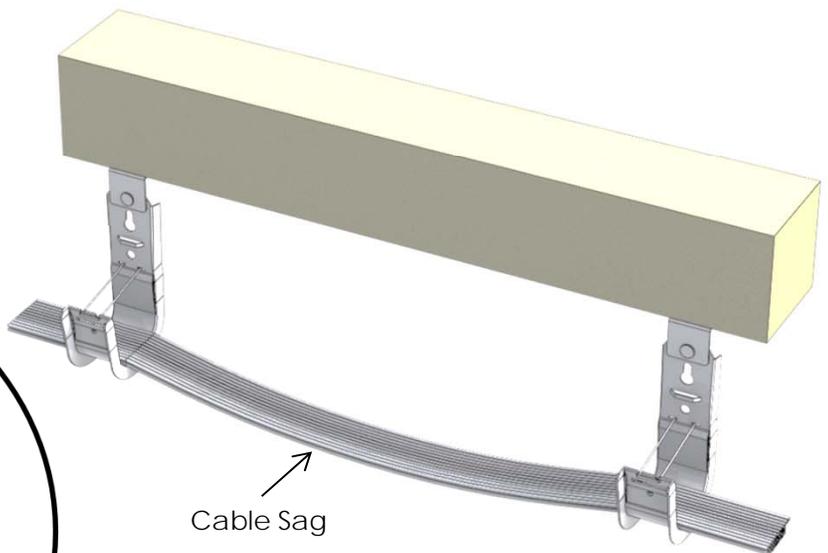**cs@icc.com**   **icc.com**
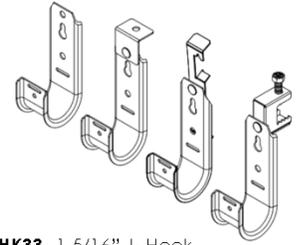
MSR-0487-RevD

# Wall and Ceiling Mount J-Hook, 25 Pack
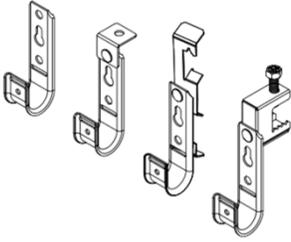
ICCMSJHK22- 3/4" J- Hook
ICCMSJH922- 3/4" J- Hook with 90° Bracket
ICCMSJHW22- 3/4" J-Hook with Bat Wing
ICCMSJHB22- 3/4" J-Hook with Beam Clamp

| Cable Qty.	Cable Type	Cable Qty.
15	4-Pair 24 AWG Ø 0.189	50
10	4-Pair 23 AWG Ø 0.236	30
5	4-Pair 23 AWG Ø 0.340	15

ICCMSJHK33- 1 5/16" J- Hook
ICCMSJH933- 1 5/16" J- Hook with 90° Bracket
ICCMSJHW33- 1 5/16" J- Hook with Bat Wing
ICCMSJHB33- 1 5/16" J- Hook with Beam Clamp
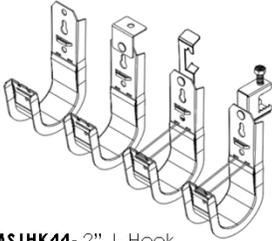
ICCMSJHK44- 2" J- Hook
ICCMSJH944- 2" J- Hook with 90° Bracket
ICCMSJHW44- 2" J- Hook with Bat Wing
ICCMSJHB44- 2" J- Hook with Beam Clamp

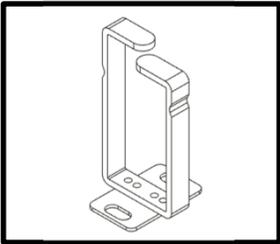| Cable Qty.	Cable Type	Cable Qty.
80	4-Pair 24 AWG Ø 0.189	160
50	4-Pair 23 AWG Ø 0.236	100
25	4-Pair 23 AWG Ø 0.340	50
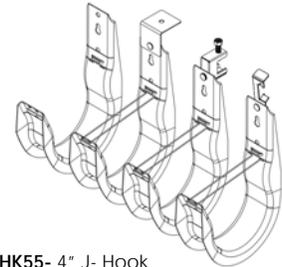
ICCMSJHK55- 4" J- Hook
ICCMSJH955- 4" J- Hook with 90° Bracket
ICCMSJHW55- 4" J- Hook with Bat Wing
**ICCMSJHW55-** 4" J- Hook with Beam Clamp

FEATURES & BENEFITS

- Designed with high quality galvanized steel for strength and durability.
- 90° angled bracket allows for the J-Hook to be ceiling mounted and pivot left to right from 0° to 180°.
- Accommodates copper premise, coaxial, fiber optic cables and conduit.
- Retainer clip secures cable in place.
- Complies with EIA/TIA requirements.
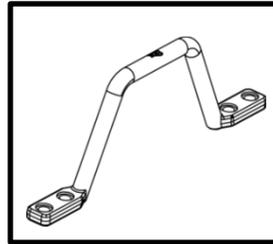- Cable anchor points allow installers to secure cable with cable ties.

OPTIONAL ACCESSORIES

Vertical Metal Ring
ICCMSCMPT1- 1.70" W
ICCMSCMPT2- 3" W
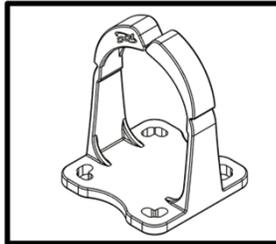
Universal Plastic Ring
ICCMSCMPR7- 3"H x 3'W

Vertical/Horizontal Plastic Ring
ICCMSCMPR5- 1.25" W
ICCMSCMPR6- 1.25" H

Metal D-Ring
ICCMSDRM02- 2" D-Ring, 100PK
ICCMSDRM03- 3" D-Ring, 100PK
ICCMSDRM05- 5" D-Ring, 100PK

Plastic D-Ring
ICCMSDRP02- 2" D-Ring, 100PK
ICCMSDRP03- 3" D-Ring, 100PK
ICCMSDRP05- 5" D-Ring, 100PK
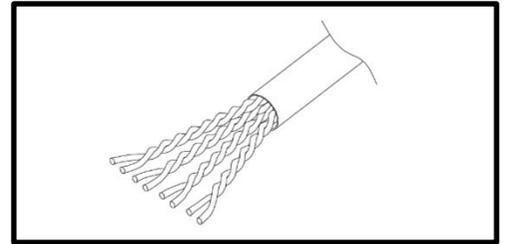
Premise Cable
ICCABR6Exx[2]- CAT 6e, 600MHz, UTP, CMR
ICCABR6Vxx[3]- CAT 6, 500MHz, UTP, CMR
ICCABT6Exx[1]- CAT 6e, 600MHz, UTP, CMP
ICCABT6Vxx[1]- CAT 6, 500MHz, UTP, CMP

xx[1] = **BL-**Blue, **WH-**White, **GY-**Gray, **YL-**Yellow, **GN-**Green
xx[2] = **BK-** Black, **BL-**Blue, **WH-**White, **GY-**Gray, **YL-**Yellow, **GN-**Green
xx[3] = **BK-** Black, **BL-**Blue, **WH-**White, **GY-**Gray, **YL-**Yellow, **GN-**Green, **Red-**Red

cs@icc.com   **icc.com**