



# 8-Port Telephone Module with Universal Mount

I N S T A L L A T I O N I N S T R U C T I O N S

## Telephone Module with RJ31X Jack


ICC's Telephone Module with RJ31X Jack is an 8-port bridged telephone solution. The module offers a 110 IDC input and an expansion jack for additional connectivity. It supports up to 8 telephone outlets for phone, fax, modem devices, and has access up to 4 incoming phone lines.

### ICRESVPA2U - Single

- A** 8-Port Telephone Module with RJ31X Jack, 1 piece
- B** Universal Mount, 1 piece


### ICRESVPA2W - 10-Pack

- A** 8-Port Telephone Module with RJ31X Jack, 10 pieces
- B** Universal Mount, 10 pieces

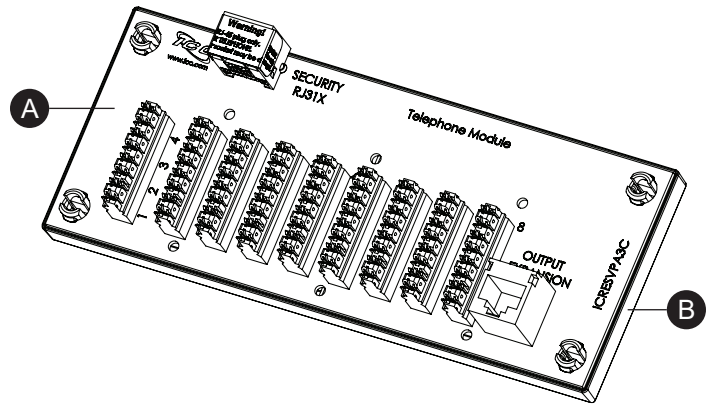


## Assembly Instructions

### Step 1

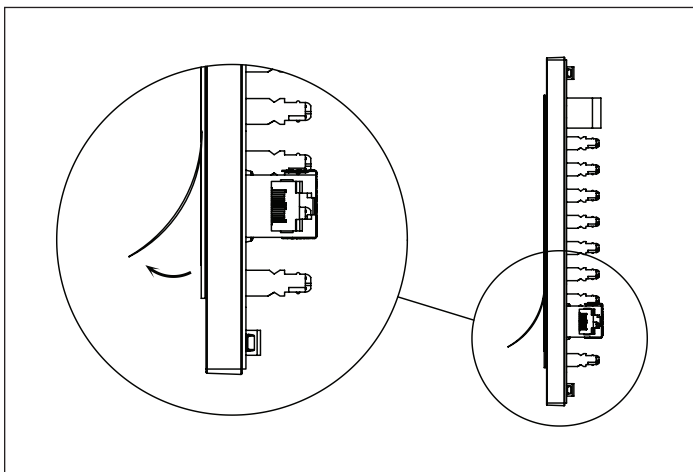

Peel off film backing from each of the self-adhesive.

### Step 2

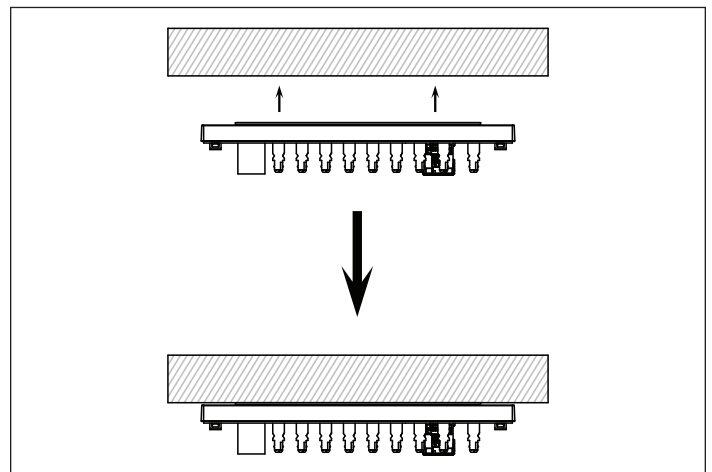

Find a flat, clean surface and press firmly on the module to adhere to the desired surface.

Email us: [cs@icc.com](mailto:cs@icc.com) • Go online: [icc.com](http://icc.com)

### Step 3

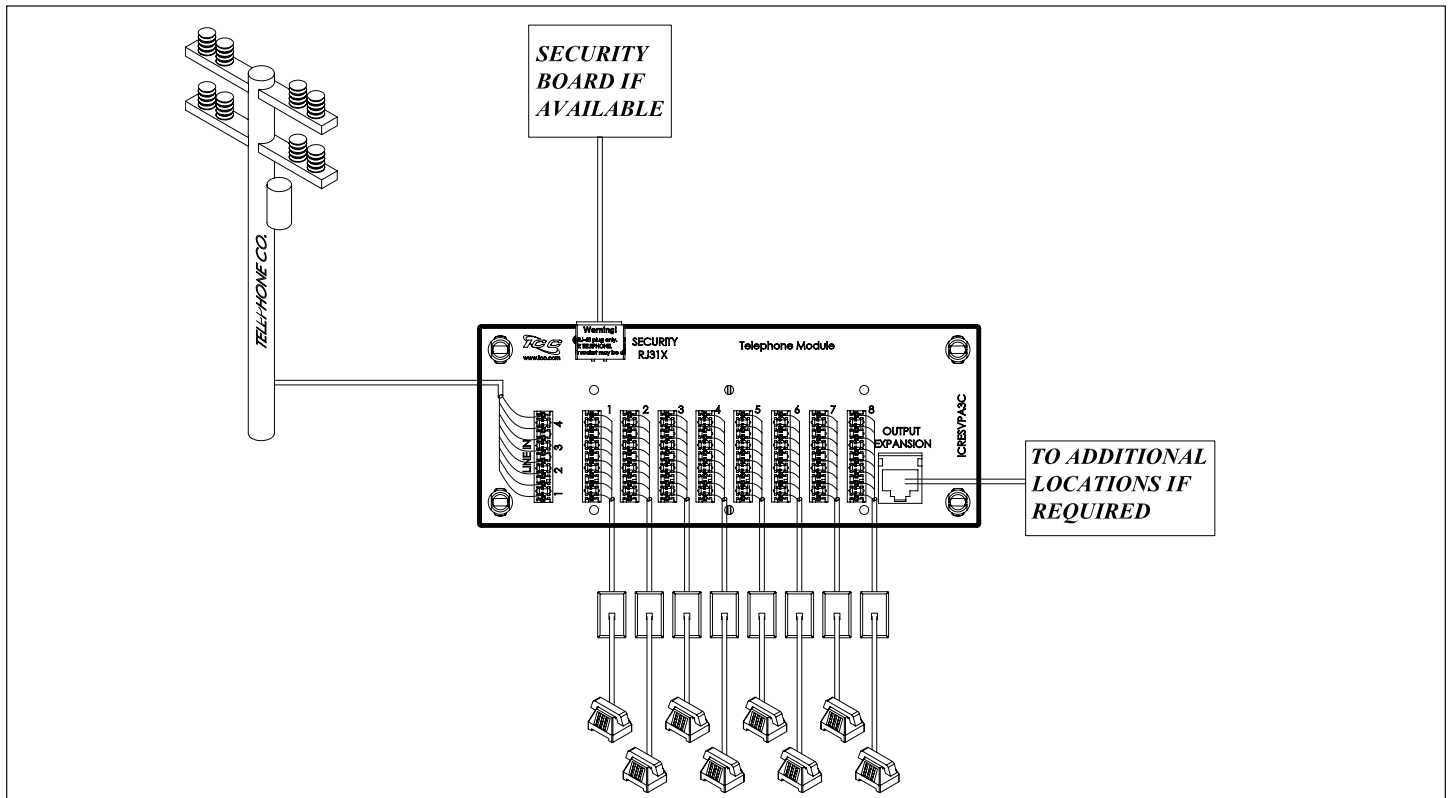


Fig 4.  
Telephone Module With RJ31x Setup

#### Wiring a 110 Connector

1. Strip 2" of cable jacket.
2. Untwist about 0.5" wire and keep jack close to 110 connector
3. According to the color code only use a 110 punch down tool to push the wire between the contact blades. Or wire may be damaged when using other tools.




Fig 4.  
Wiring

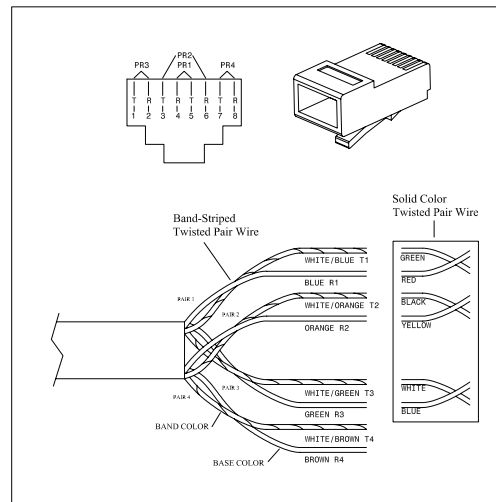


Fig 5.  
RJ-45 Jack

Connect the incoming phone line to the 110 IDC labeled "From Source." Use a 110 punch down tool to terminate each wire between contact blades. Identify each outlet cable and connect to 110 block labeled "To Location." Punch down twisted pairs depending on which lines are desired to be activated at each location.

NOTE: Line #1 = Blue, Line #2 = Orange, Line #3 = Green, Line #4 = Brown

Example: Each 110-block represents one location. If you want to activate Line#1 at Location #1, simply punch down the twisted pair (White Blue/Blue) to the first 110-block. If you want to use a 2-line phone (Line #1 & Line #2) at Location #1, simply punch down twisted pairs (White Blue/Blue & White Orange/Orange) to the first 110-block to support 2-line phone.

WIRE INSTALLATION: For 110 IDC connector, follow the wire color-code and only use the 110 punch-down tool to terminate the wire between the contact blades.

RJ-45 Jacks: Phone and data lines are wired according to the TIA T-568-A standard.

Email us: [cs@icc.com](mailto:cs@icc.com) • Go online: [icc.com](http://icc.com)