


Preterminated 66 Wiring Black w/8 RJ-11 Jacks 6P6C

Package Includes:



- A. 6P6C Prewired 66 Wiring Block, 1 pc
- B. 89D Mounting Bracket, 1pc
- C. 66 Wiring Block Cover, 1pc

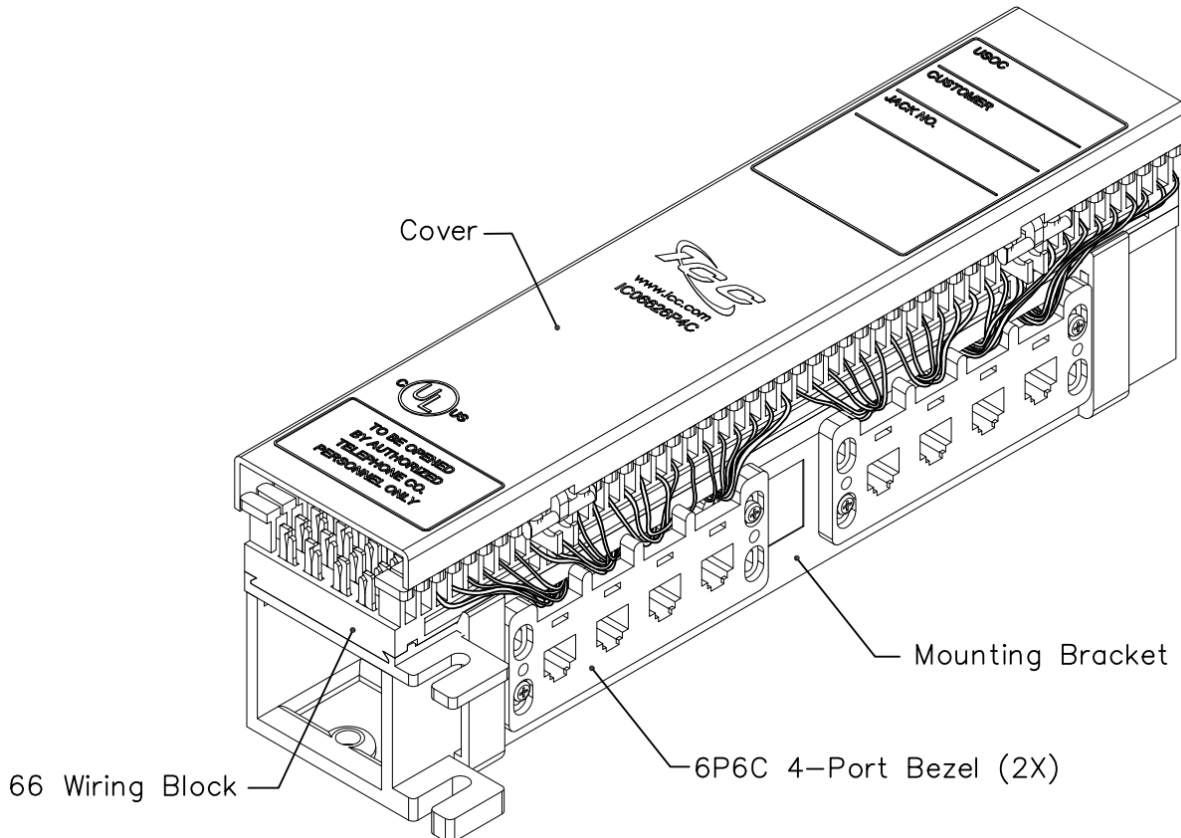

Features and Benefits

- Designed for voice, PBX systems, and low voltage telecom equipment.
- Durable and strong high impact flame retardant material.
- Includes 89D mounting bracket for wall mounting.
- Accommodates IC066BRCLP 66 wiring block bridging clips.
- Removable hinged cover.
- Accepts 22-24 AWG.
- Country Of Origin: Taiwan
- TAA Compliant

Product Specification

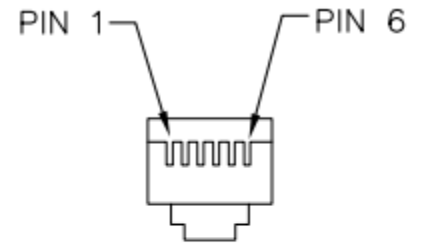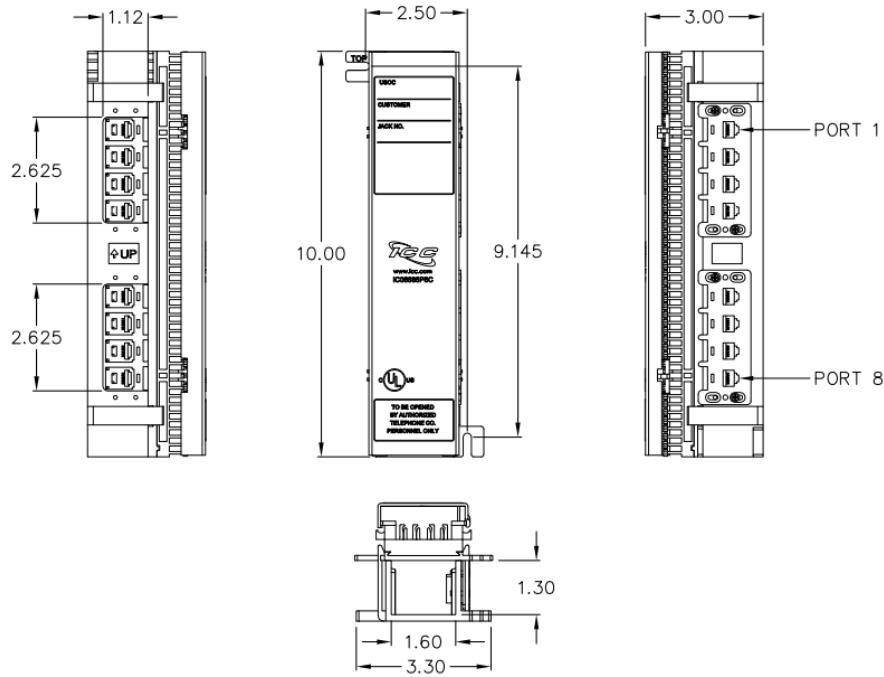

PIN	WIRE COLOR
1	WHITE
2	BLACK
3	RED
4	GREEN
5	YELLOW
6	BLUE

NOTE: UNLESS OTHERWISE SPECIFIED

MATERIAL:

1.

- A. HOUSING: HIGH IMPACT FLAME RETARDANT PLASTIC, UL 94VO
- B. IDC: BRASS WITH 100 MICRO-INCH OF TIN
- C. SPRING WIRE: PHOSPHOR BRONZE ALLOY PLATED WITH 50 MICRO-INCH OF GOLD OVER 70-100 MICRO INCH OR NICKEL

TEMPERATURE RANGE:

- A. STORAGE: -40'TO+70'C
- B. OPERATION: -10'TO+60'C
- C. MAXIMUM NONCONDENSING: 93%

ELECTRICAL:

- A. ELECTRICAL INSULATION RESISTANCE: -500 MOHM MIN @ 100VDC
- B. DIELECTRIC WITHSTANDING VOLTAGE: -1000V RMS @ 60Hz FOR 1 MINUTE
- C. CONTACT RESISTANCE: 2.5 MOHMS MAX

MECHANICAL:

- A. RETENTION: 50N (11 LBF) FOR 60S ± 5S
- B. INSERTION/EXTRACTION LIFE: 750 CYCLES MINIMUM
- C. IDC WIRE GAUGE: 22-24 AWG