
5 Pair 110 Connecting Block, 100 Pack

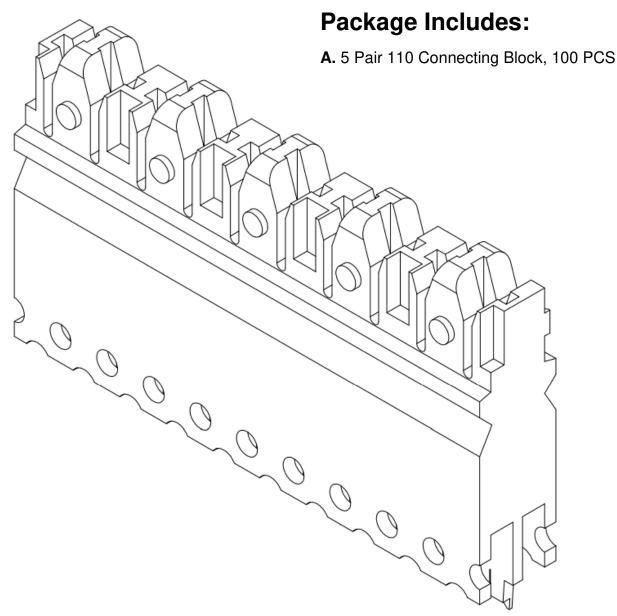


Features and Benefits


- Designed for voice and data applications
- Performance exceeds Category 5e connecting hardware requirements specified in TIA/EIA-568-C.2
- Color coded and designed for repeated use
- Accepts 26-22 AWG solid or stranded wires
- Used with IC11O wiring blocks and IC110TC termination caps
- Country Of Origin: Taiwan
- TAA Compliant


Part No: IC110CB5PC

Rev: A Page 1 of 2



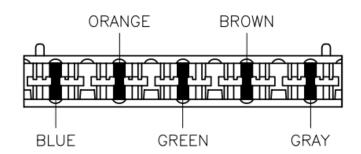

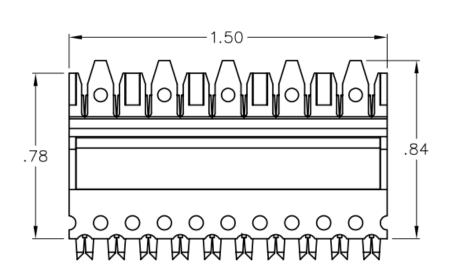



CAT 5e CONNECTING HARDWARE REQUIREMENTS										
FREQUENCY (MHz)	1.0	4.0	8.0	10.0	16.0	20.0	25.0	31.25	62.5	100
NEXT LOSS (db)	65.0	65.0	64.9	63.0	58.9	57.0	55.0	53.1	47.1	43.0
FEXT LOSS (db)	75.1	63.1	57.0	55.1	51.0	49.1	47.1	45.2	39.2	35.1
RETURN LOSS (db)	35.0	35.0	35.0	35.0	35.0	34.0	32.0	30.1	24.1	20.0
INSERTION LOSS(db)	0.10	0.10	0.10	0.10	0.20	0.20	0.20	0.20	0.30	0.40

NOTE: UNLESS OTHERWISE SPECIFIED

1. MATERIAL:

A. CONTACT: COPPER ALLOY, 100 MICRO INCHES BRIGHT SOLDER OVER 100 MICRO INCHES OF NICKEL UNDERPLATE

B. HOUSING: ABS, UL 94V-0

Part No: IC110CB5PC

Rev: A Page 2 of 2 I 888-ASK-4ICC icc.com csr@icc.com

