


6P6C Voice Wall Plate

Package Include:

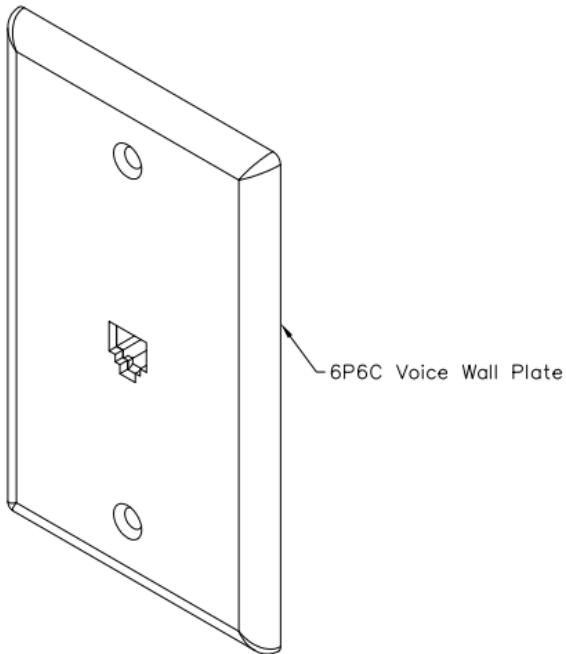


A. 6P6C Voice Wall Plate, 1 Piece

**B. #6-32 x 3/4" Oval Head, Countersink
Machine Screw, 2 Pieces**


Features and Benefits

- Configured to fit standard single gang outlet box
- Designed for all voice connectivity to the work area for commercial or residential applications
- Provides with traditional screw down terminals for source connectivity on the rear
- Rugged and durable construction
- Available in Ivory and White
- NASI/TIA-568-C and UL 1863 compliant

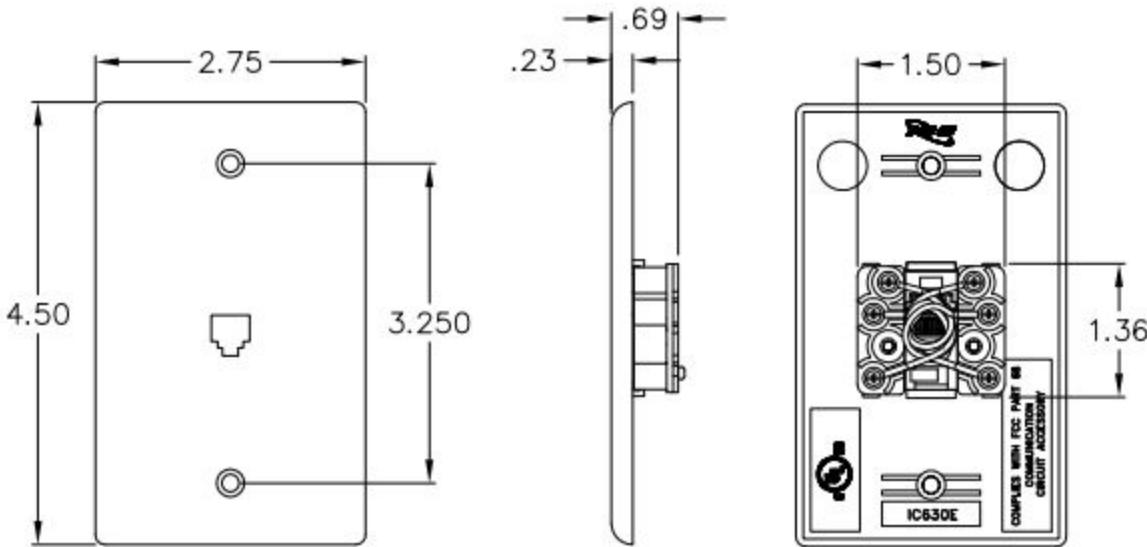

Specifications

- FACEPLATE:
 - MATERIAL: ABS, UL 94V-0
 - COLOR: XX: IV- IVORY & WH-WHITE
- WIRING BLOCK:
 - MATERIAL & FINISH:
 - HOUSING: ABS, UL 94V-0
 - SPRING WIRE CONTACTS: PHOSPHOR BRONZE GOLD PLATING OVER 100 MICRO INCH NICKEL
 - GOLD PLATING: 1.27 MICRON/50 MICRO INCH MIN
 - WIRE LEADS: 26AWG STRANDED WIRE
 - TERMINATIONS SCREWS: #6-20 X .415 FLAT PAN HEAD TAPPING SCREWS WITH TWO WASHERS 15 LBS/INCH MIN TORQUE ZINC CHROMATIC PLATED STEEL
 - TERMINATION LUGS: BRASS
 - ELECTRICAL
 - CURRENT RATING: 1.5 AMP MAX
 - DIELECTRIC WITHSTANDING VOLTAGE: 1,00 VOLTS RMS, 60 Hz
 - CONTACT RESISTANCE: <20 MILLIOHMS
 - INSULATION RESISTANCE:> 10 MEHAOHMS
 - PERFORMANCE: RETURN LOSS OF -20dB MAX FREQUENCY RANGE DC -1.5 GHz
 - MECHANICAL:
 - TOTAL MATING FORCE: 500 GRAMS FOR 6 WIRES LEAD
 - RETENTION: 17 LBS BETWEEN JACK AND PLUG
 - CRIMP TENSILE STRENGTH: 4.0-500 LBS

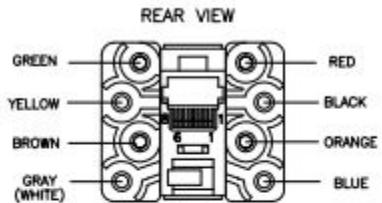

WIRING DIAGRAM

JACK POSITION	WIRE COLOR	6 COND.
1	WHITE	
2	BLACK	
3	RED	
4	GREEN	
5	YELLOW	
6	BLUE	