

LC-ST 50/125 μ m OM2 MM Duplex Fiber Optic Jumper




Package Includes

- A. LC-ST 50/125 μ m OM2 MM Duplex Fiber Jumper, 1 pc.
- B. Test Results Label, 1 pc.

Features and Benefits

- Made from OFNR riser rated cables, exceeding industry requirements
- Used with ICC fiber optic products
- Available in 1, 2, 3, 5, 7, and 10 meters
- Dust Cap included
- Test results included

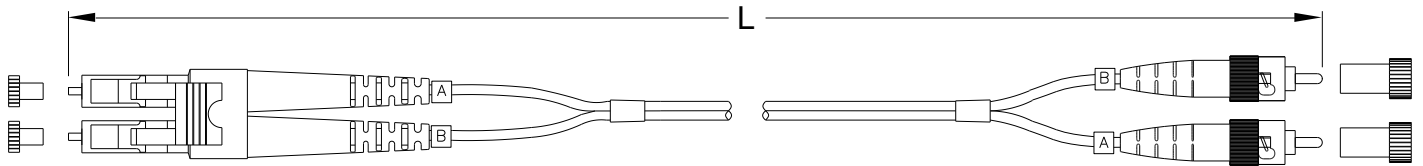

NOTE: UNLESS OTHERWISE SPECIFIED

1. Cable:

- A. Color: Orange
- B. Fiber Counts: 2 Fiber Zipcord
- C. Fiber Type: Multimode 50/125µm
- D. Attenuation: 2.3/0.6 dB/km @ 850/1300 nm
- E. Bandwidth: 950 MHz.km EMB @ 850 nm
- F. Cable Data:
 - Cable diameter: .079 in (2.0mm)
 - Bend radius: 1.2" MIN
 - Loading: 135 lbs. MAX

ITEM NUMBER	L (LENGTH)
ICFOJ3M701	1 METER ± 10 CM
ICFOJ3M702	2 METER ± 10 CM
ICFOJ3M703	3 METER ± 10 CM
ICFOJ3M705	5 METER ± 10 CM
ICFOJ3M707	7 METER ± 10 CM
ICFOJ3M710	10 METER ± 10 CM

2. LC Connector:

- A. Ferrule: Zirconia
- B. Insertion Loss: 0.2 dB Typical, 0.3 dB MAX
- C. Return Loss: 55 dB MIN
- D. UPC Polish

3. ST Connector:

- A. Ferrule: Zirconia
- B. Insertion Loss: 0.2 dB Typical, 0.3 dB MAX
- C. Return Loss: 55 dB
- D. UPC Polish

4. Compliance:

- A. ANSI/TIA-568-C.3

5. Length: XX: 01, 02, 03, 05, 07, & 10