


12 Port Category 5e Front Access Patch Panel


Package Includes:

- A. 12 Port CAT 5e Patch Panel, 1 PC
- B. # 12-24 x 3/4" Machine Screw, 2 PCS
- C. Cable Tie, 4 PCS
- D. Installation Instructions, 1 Sheet

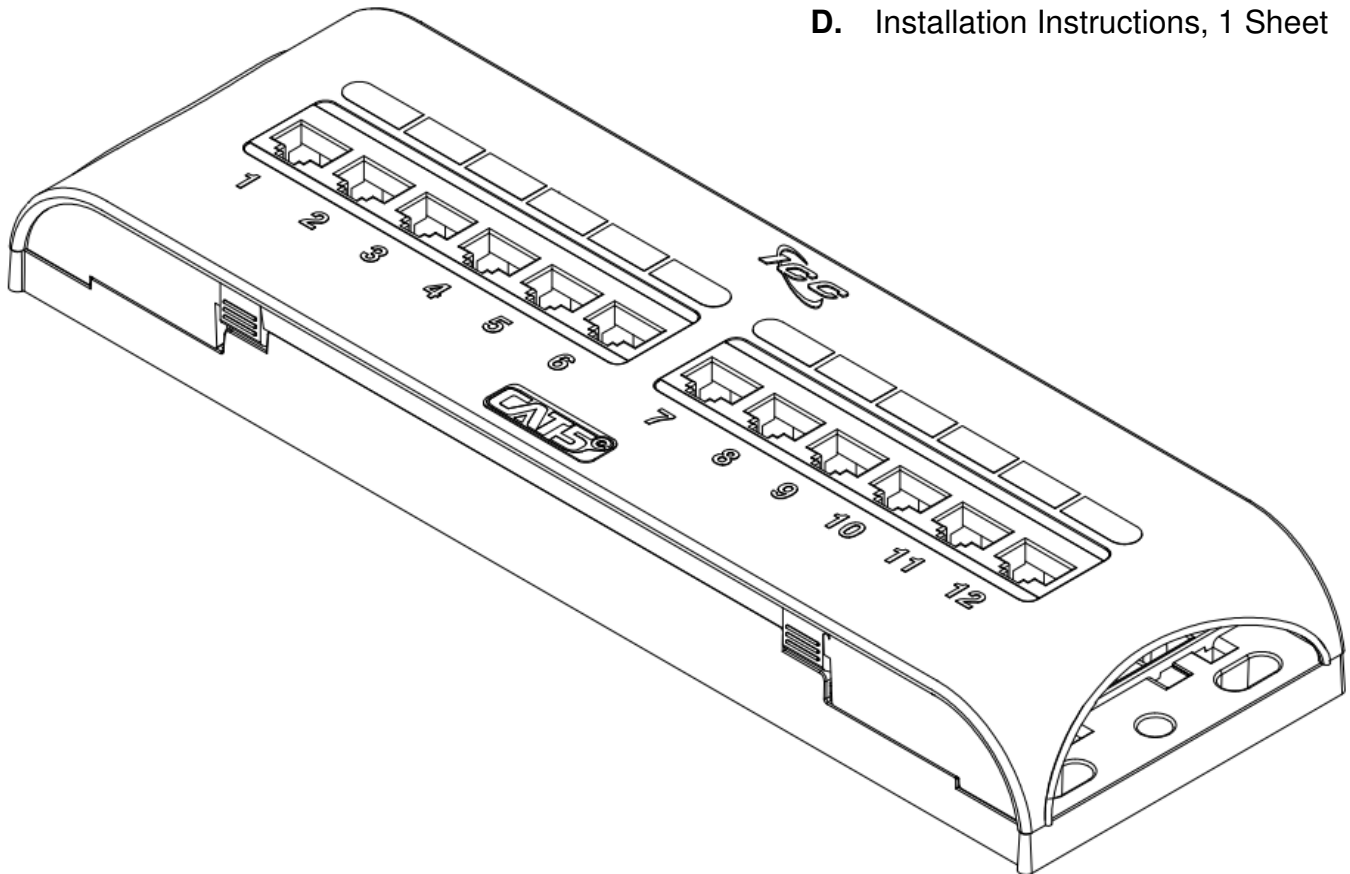

Features and Benefits

- Wall mounted CAT 5e component rated patch panel provides excellent performance for data networks requiring maximum speed and bandwidth
- Enhanced crosstalk cancellation reduces return loss and improves performance by rejecting noise and unwanted signals
- Exceeds TIA-568-C.2 Category 5e connecting hardware requirements
- Engineered to provide 110 IDC termination reducing installation time
- Used with ICPCSJ CAT 5e patch cords, ICACSPDT00 110 punch down tool, and ICCMSR19XX distribution rack
- Installation instructions
- Country of Origin: Taiwan
- TAA Compliant

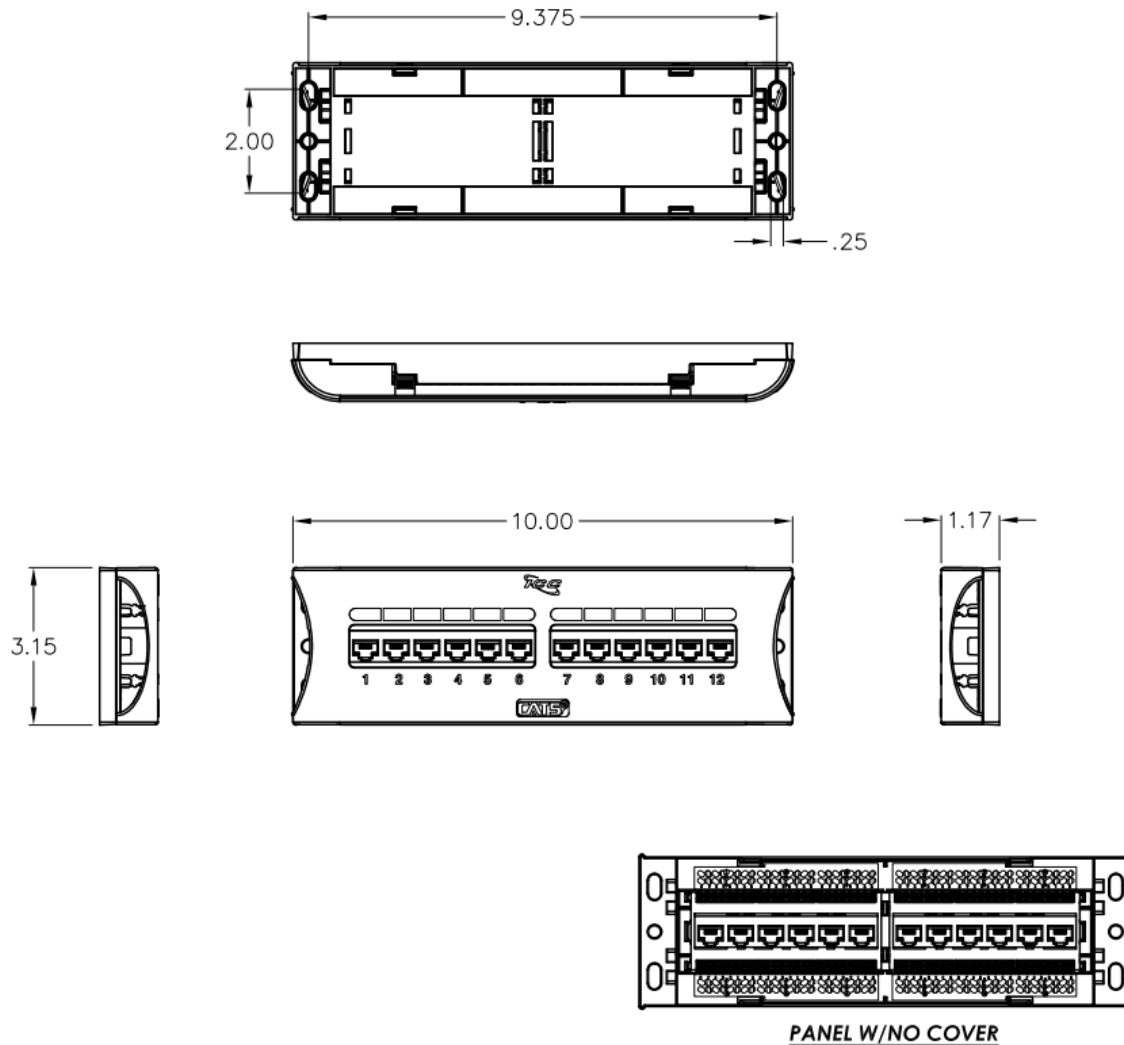

NOTE: UNLESS OTHERWISE SPECIFIED

1. 12 PORT CAT 5e PATCH PANEL:

A. MATERIAL;

- i. 12 PORT PATCH PANEL: ABS UL 94V-0
- ii. SPRING WIRE: PHOSPHOR BRONZE
- iii. 110 CONNECTOR: PHOSPHOR BRONZE ALLOY WITH 100 MICRO-INCH ALLOY
- iv. GOLD RATING: 50 MICRO INCHES OF GOLD OVER 100 MICRO INCHES OF NICKEL

B. MECHANICAL:

- i. MATING FORCE: 100 GRAMS MIN/CONTACT TEMPERATURE RANGE: -40°-70°C
- ii. PLUG RETENTION IN JACK: 50N (11 LBS SQ)
- iii. IDC WIRE GAUGE: 22-24 AWG

C. ELECTRICAL:

- i. CURRENT RATING: 1.5 AMP DC
- ii. CONTACT RESISTANCE: 2.5 MILOHMS MAX