


12-Port Category 6 Front Access Patch Panel

PRODUCT SPECIFICATION

Package includes:

- A. 12-Port CAT 6 Patch Panel, 1 pc
- B. #12-24 X $\frac{3}{4}$ ", Machine Screw, 2 pcs
- C. Cable Tie, 4 pcs
- D. Installation Instructions, 1 sheet

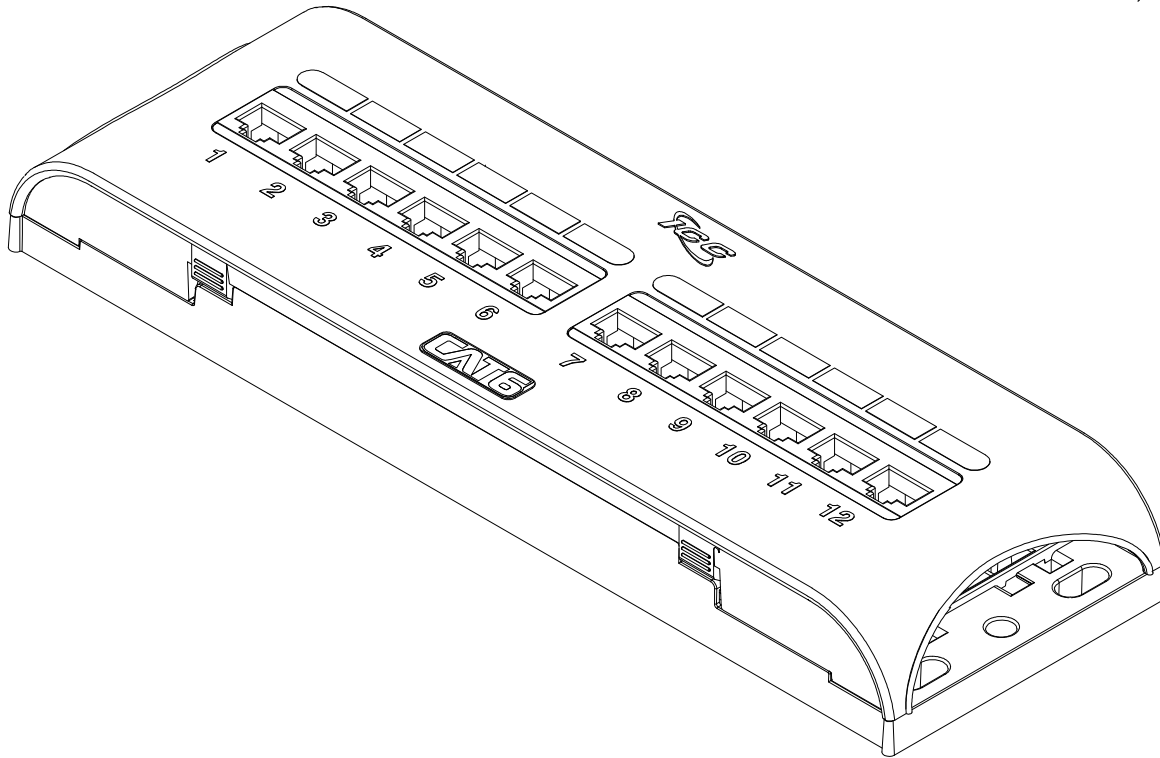

Features and Benefits:

- Wall mounted CAT 6 component rated patch panel provides excellent performance for data networks requiring maximum speed and bandwidth.
- Enhanced crosstalk cancellation reduces return loss and improves performance by rejecting noise and unwanted signals.
- Exceeds TIA-568-C.2 Category 6 connecting hardware requirements.
- Engineered to provide 110 IDC termination reducing installation time.
- Used with ICPCSK CAT 6 patch cords, ICACSPDT00 110 punch down tool, and ICCMSR19xx distribution rack
- Installation instructions.




PATCH PANEL, CAT 6 FRONT, 12-PORT

ITEM NO. ICMPP12F6E
DWG NO. PSMPP12F6E

REV. A
PAGE NO. 1



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com

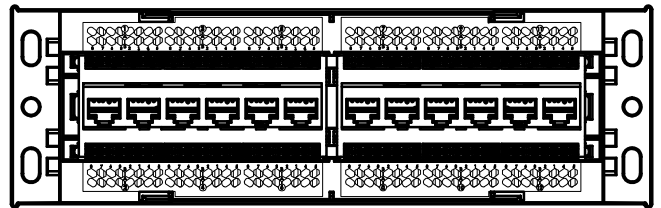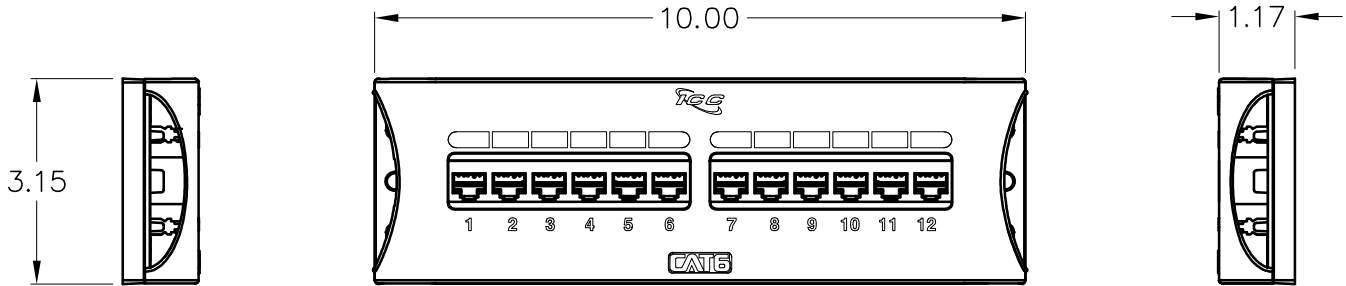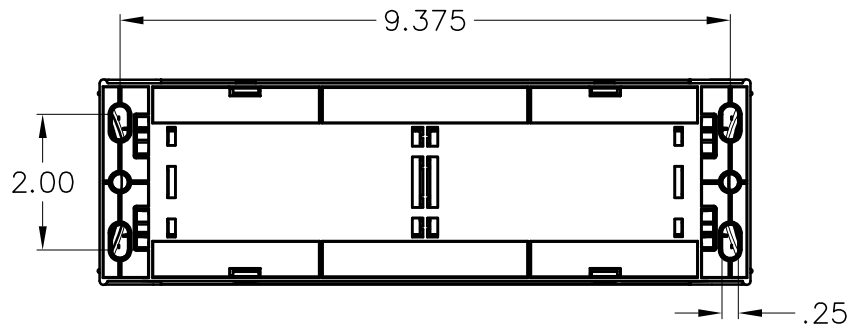

PANEL W/NO COVER

NOTE: UNLESS OTHERWISE SPECIFIED

1. 12-PORT CAT 6 PATCH PANEL:

A. MATERIAL:

- 12-PORT PATCH PANEL: ABS, UL 94V-0
- JACK HOUSING: HIGH IMPACT, FLAME RETARDANT PLASTIC, UL 94V-0
- SPRING WIRE: PHOSPHOR BRONZE
- 110 CONNECTOR: PHOSPHOR BRONZE ALLOY WITH 100 MICRO-INCH ALLOY
- GOLD RATING: 50 MICRO INCHES OF GOLD OVER 100 MICRO INCHES OF NICKEL


B. SURFACE FINISH: BLACK POWDER COAT

C. MECHANICAL:

- MATING FORCE: 100 GRAMS MIN/CONTACT
- TEMPERATURE RANGE: -40°~70°C
- PLUG RETENTION IN JACK: 50N (11 LBS SQ)
- IDC WIRE GAUGE: 22~24 AWG

D. ELECTRICAL:

- CURRENT RATING: 1.5 AMP DC
- CONTACT RESISTANCE: 2.5 MILOHMS MAX

PATCH PANEL, CAT 6 FRONT, 12-PORT		 Premium Products Proven Performance Competitive Prices	
ITEM NO.	ICMPP12F6E		REV. A
DWG NO.	PSMPP12F6E	PAGE NO.	2

CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com