

# 24-Port 6P4C Female Telco Patch Panel

---

## Package Includes

- A. 24-Port 6P4C Telco Patch Panel, 1 pc
- B. #12-24 x 5/8" Pan Head, Pilot Point Machine Screw, 4 pcs




## Features and Benefits

- Rack mounted 6-position 4-conductor Telco patch panel provides voice connectivity applications
- Integrated with two female 50-pin Telco connectors
- Designed to fit all standard 19" racks and cabinets
- 1 rack mount space (RMS)
- Country of Origin: Taiwan
- TAA Compliant



# Specifications

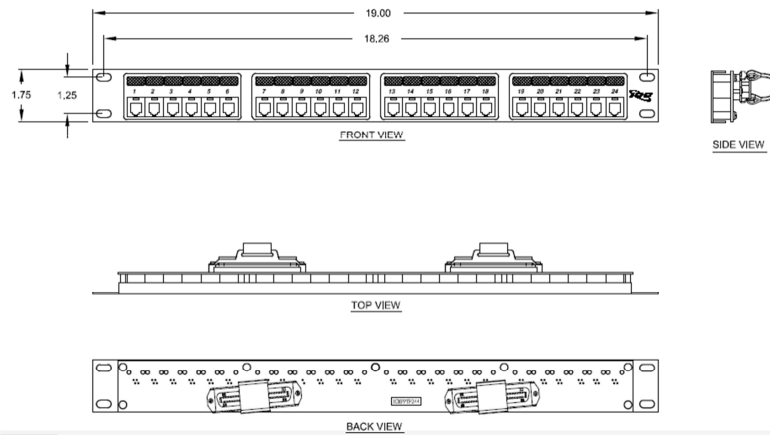

WIRING CHART			WIRING CHART		
PORT NO.	TELCO 50 PIN	USOC RJ-11 4-WIRE	PORT NO.	TELCO 50 PIN	USOC RJ-11 2-WIRE
PORT 1	26	4	PORT 13	26	4
	1	3		1	3
	27	2		27	2
	2	5		2	5
	28	4		28	4
PORT 2	3	3	PORT 14	3	3
	29	2		29	2
	4	5		4	5
	30	4		30	4
	5	3		5	3
PORT 3	31	2	PORT 15	31	2
	6	5		6	5
	32	4		32	4
	7	3		7	3
	33	2		33	2
PORT 4	8	5	PORT 16	8	5
	34	4		34	4
	9	3		9	3
	35	2		35	2
	10	5		10	5
PORT 5	36	4	PORT 17	36	4
	11	3		11	3
	37	2		37	2
	12	5		12	5
	38	4		38	4
PORT 6	13	3	PORT 18	13	3
	39	2		39	2
	14	5		14	5
	40	4		40	4
	15	3		41	3
PORT 7	41	2	PORT 19	42	4
	16	5		43	3
	42	4		44	4
	17	3		45	2
	43	2		46	4
PORT 8	18	5	PORT 20	47	2
	44	4		48	4
	19	3		49	2
	45	2		50	5
	20	5		21	3
PORT 9	21	3	PORT 21	22	5
	46	4		23	3
	22	5		24	5
	47	2		25	5
	23	3		26	4
PORT 10	48	4	PORT 22	27	2
	24	5		28	4
	49	2		29	2
	25	5		30	4
	50	5		31	2
PORT 11	26	4	PORT 23	32	4
	27	2		33	2
	28	4		34	4
	29	2		35	2
	30	4		36	4
PORT 12	31	2	PORT 24	37	2
	32	4		38	4
	33	2		39	2
	34	4		40	4
	35	2		41	3
-	25	OPEN	-	25	OPEN

00 x 3.50 in

**NOTE: UNLESS OTHERWISE SPECIFIED**

1. MATERIAL:

- A. 24-PORT PATCH PANEL: 16 GA CRS
- B. JACK HOUSING: ABS, UL 94V-0
- C. SPRING WIRE: SQUARE SPRING WIRE, TEMPERED PHOSPHOR BRONZE
- D. GOLD RATING: 50 MICRO INCHES OF GOLD OVER 100 MICRO INCHES OF NICKEL

2. SURFACE FINISH: BLACK POWDER COAT

For warranty information, go online to [icc.com/warranty](http://icc.com/warranty).

Part No: ICMPPTF244 Rev: A

Part No.: ICMPPTF244

Rev: A

| 888-ASK-4ICC | [icc.com](http://icc.com) | [csr@icc.com](mailto:csr@icc.com) |

Page 2 of 2

