


8-Room Audio Module

PRODUCT SPECIFICATION

Package includes:

A. 8-Room Audio Module, 1 pc

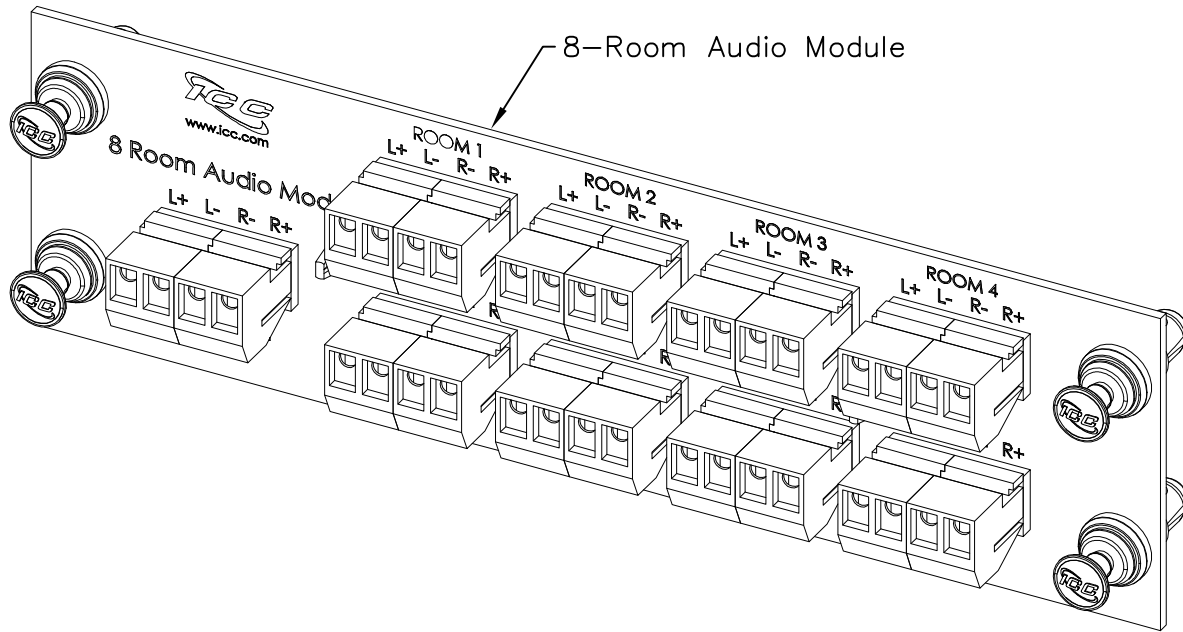

Features and Benefits:

- Designed to fit ICC's 14", 21", and 28" Net Media Enclosures.
- Distribute high quality stereo sound to as many as 8 different locations from a single source.
- Removable terminal blocks facilitate installation.
- Parallel connectivity of 16 terminal blocks.
- Accepts 14~22 AWG, solid or stranded wire.



COMPACT MODULE, 8-ROOM AUDIO

ITEM NO.	ICRESAD83C
DWG NO.	PSRESAD83C

REV.	A
PAGE NO.	1



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 2100 E. Valencia Dr, Suite D, Fullerton, CA 92831 * www.icc.com

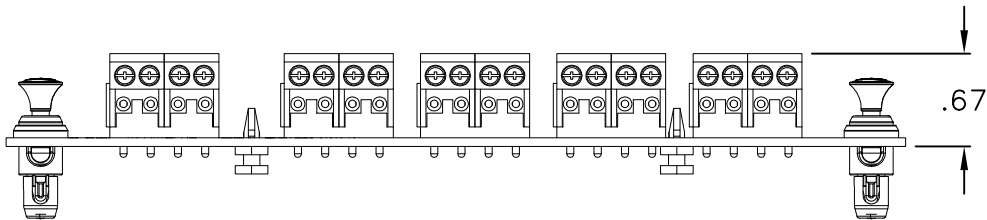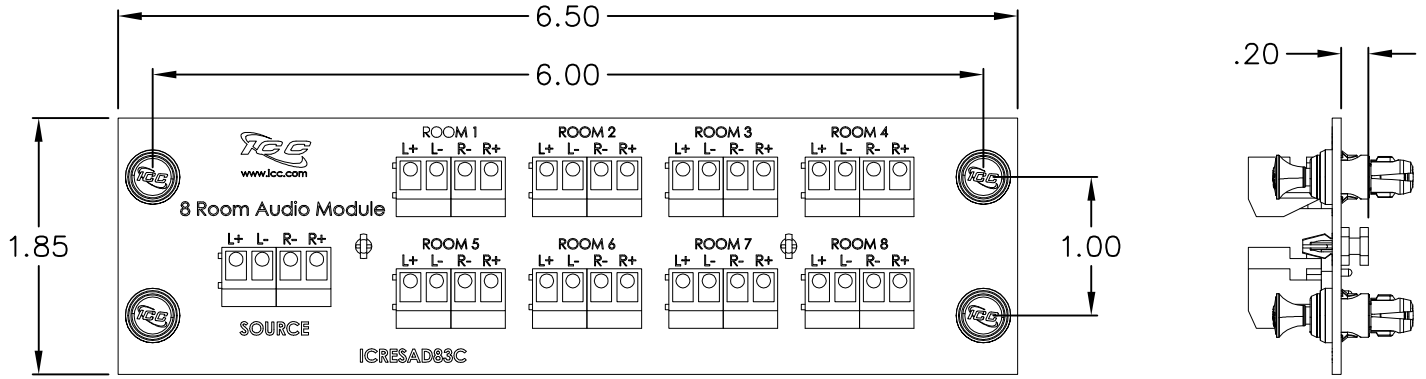

NOTE: UNLESS OTHERWISE SPECIFIED

1. 8 ROOM AUDIO MODULE:

A. PCB: GLASS EPOXY FR-4 COPPER CLAD, t=1.6MM

2. TERMINAL BLOCK:

A. HOUSING: PA66

B. CLAMP: BRONZE, TIN PLATED

C. SCREW: STEEL ZINC PLATING, 2.6MM

-ELECTRICAL:

D. VOLTAGE RATING: 300V/250V

E. CURRENT RATING: 10A/10A

F. WITHSTANDING VOLTAGE: 1.6KV/1.6KV/2KB

G. OPERATING TEMPERATURE: -30°C TO +105°C

-MECHANICAL

H. WIRE GAUGE: 14-22 AWG (SOLID OR STRANDED)

I. TORQUE: 3.5LBS/IN

J. WIRE STRIP LENGTH: 0.6-0.63" (5-6MM)

3. TERMINAL BLOCK HEADER:

A. HOUSING: PA66, GRAY, UL94V-0

B. SOLDER PIN: BRASS, TIN PLATED

-ELECTRICAL:

C. VOLTAGE RATING: 300V AC

D. CURRENT RATING: 15A

E. WITHSTANDING VOLTAGE: 1.6KV

F. OPERATING TEMPERATURE: -30°C TO +105°C

G. SOLDERING TEMPERATURE: 250°C±10°C/5 SEC

4. LOCKING BUTTON: NYLON 6/6, UL 94V-0

COMPACT MODULE, 8-ROOM AUDIO

ITEM NO. ICRESAD83C

REV. A

DWG NO. PSRESAD83C

PAGE NO. 2



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 2100 E. Valencia Dr, Suite D, Fullerton, CA 92831 * www.icc.com