
Combo, Net Media Center 14", 6-Port Voice & Data

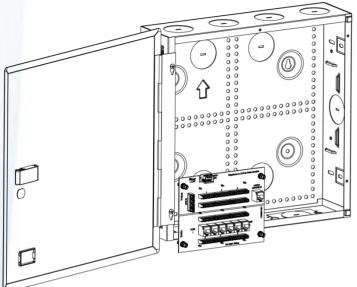

Package Includes:

- A. 14" Net Media Center Box Assembly, 1 Piece
- B. 14" Net Media Center Door, 1 Piece
- **C.** 6-Port CAT 5e Data & 6-Port Telephone Module w/RJ31x.1 **Piece**
- **D.** #10-24 x 1", Wood Screw, **4 Pieces**
- E. Wiring Location Sheet, 1 Sheet
- F. Protective Cover, 1 Piece

Features and Benefits


- Designed to serve as the central distribution point for voice, data, video, audio, and security services
- Allows for internal modules to be mounted horizontally or vertically
- Works with connectivity modules with push and pull fasteners
- Snap-in system enables users to quickly insert or move the modules
- 8 internal module mounting spaces
- 20-gauge steel construction, white powder coated, lightweight, and sturdy
- Fits between 16" studs or can be wall mounted
- Depth mark on the enclosure simplifies adjustment for drywall depths (1¾", 1½", 1½", 1½", 7/8", ¾," 5/8").
- Enclosure combos are not designed to be installed in firewall applications
- Complies with UL 1863, TIA-568-C, TIA-570-B, and TIA-607 standards
- The door is reversible, designed with a latch for opening, and has a knockout for an optional padlock
- Can hold up to 6 cable management rings for routing cable

Part No: ICRESDC14W


Rev: A Page 1 of 3 I 888-ASK-4ICC icc.com csr@icc.com



Product Specification

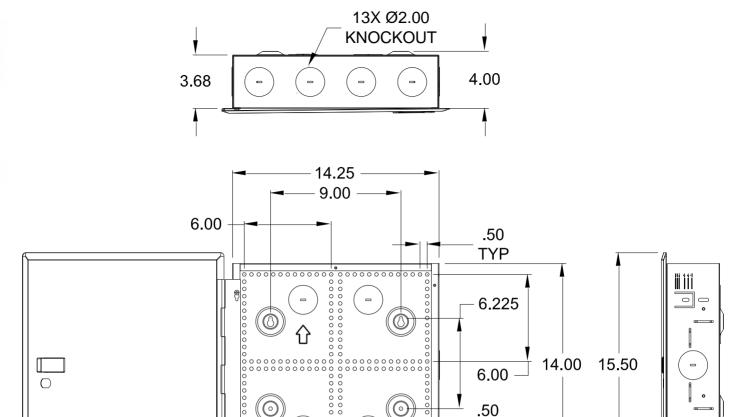

TYP

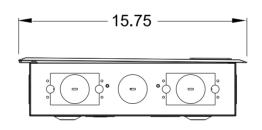

.625

30.58 FULLY OPENED

NOTE: UNLESS OTHERWISE SPECIFIED

A. Material: 20 GA CRS

B. Surface Finish: White Powder Coat

Part No: ICRESDC14W


Rev: A Page 2 of 3 I 888-ASK-4ICC icc.com csr@icc.com




Product Specification

NOTE: UNLESS OTHERWISE SPECIFIED

- 1. 6-Port CAT 5e Data & 6-Port Telephone Module with RJ31X Jack:
 - A. PCB: Glass Epoxy FR4 Copper Clad, t=1.20mm
 - **B.** 110 Block:
 - 1. Housing: PC, UL 94V-0
 - IDC: Phosphorous Bronze, Tin Plated
 - C. RJ45 & RJ31X Jack/Socket:
 - 1. Housing: PBT + 15% Fiber Glass
 - 2. Contact: Phosphorous Bronze, 50µ" Gold Plated
 - D. Wiring in accordance to T568A
- 2. Locking Button: Material: Nylon 6/6, UL 96V-0



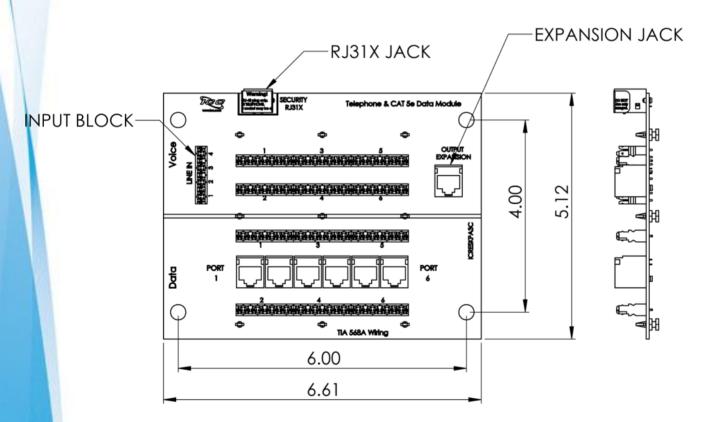



Rev: A Page 3 of 3

