


6P6C Voice & F-Type Wall Plate

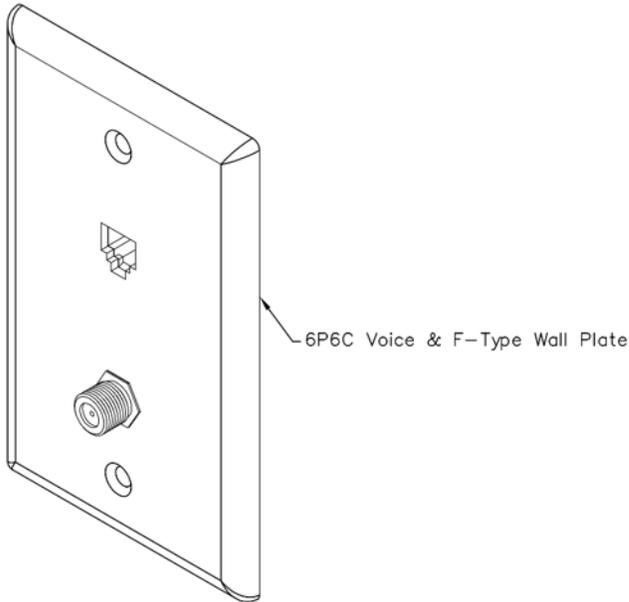


Package Include:

- A. 6P6C Voice & F-Type Wall Plate, 1 Piece**
- B. #6-32 x 3/4" Oval Head, Countersink Machine Screw, 2 Pieces**

Features and Benefits

- Configured to fit standard single gang outlet box
- Designed for all voice connectivity, audio, and video applications to the work area for commercial or residential applications
- Provides with traditional screw down terminals for source connectivity on the rear
- Gold Plated F-Type connector for improved performance with superior signal quality with minimal noise
- Designed to use with both RG6 and RG59 coaxial cables on the rear side
- Rear threaded F-Type connector for secure in-wall connections
- Rugged and durable construction
- Available in Ivory and White
- NASI/TIA-568-C and UL 1863 compliant

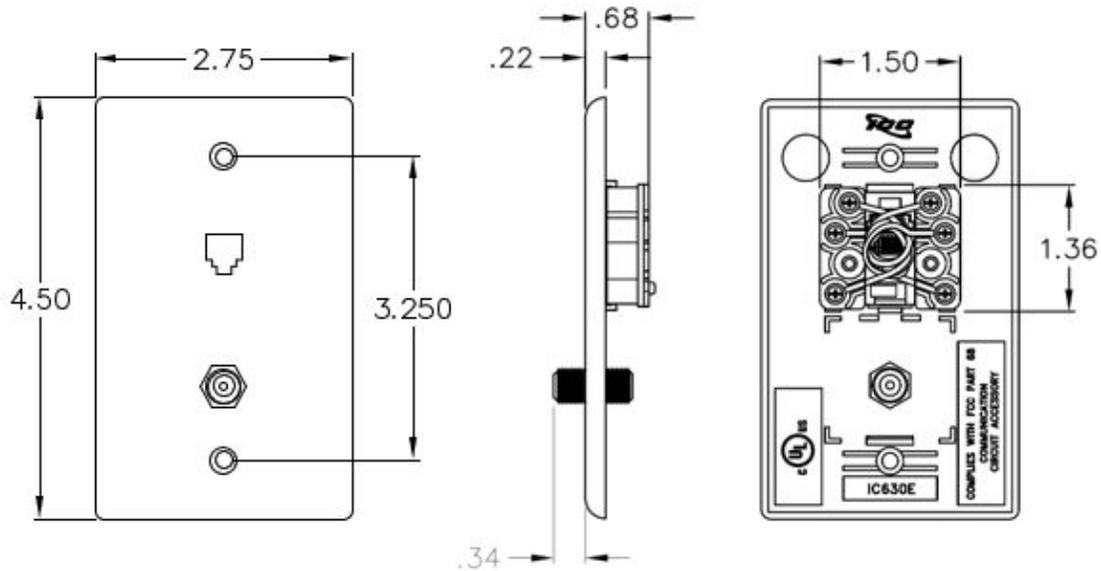

Specifications

- FACEPLATE:
 - MATERIAL: ABS, UL 94V-0
 - COLOR: XX: IV- IVORY & WH-WHITE
- WIRING BLOCK:
 - MATERIAL & FINISH:
 - HOUSING: ABS, UL 94V-0
 - SPRING WIRE CONTACTS: PHOSPHOR BRONZE GOLD PLATING OVER 100 MICRO INCH NICKEL
 - GOLD PLATING: 1.27 MICRON/50 MICRO INCH MIN
 - WIRE LEADS: 26AWG STRANDED WIRE
 - TERMINATIONS SCREWS: #6-20 X .415 FLAT PAN HEAD TAPPING SCREWS WITH TWO WASHERS 15 LBS/INCH MIN TORQUE ZINC CHROMATIC PLATED STEEL
 - TERMINATION LUGS: BRASS
 - ELECTRICAL
 - CURRENT RATING: 1.5 AMP MAX
 - DIELECTRIC WITHASTNADING VOLTAGE: 1,00 VOLTS RMS, 60 Hz
 - CONTACT RESISTANCE: <20 MILLIOHMS
 - INSULATION RESISTANCE:> 10 MEHAOHMS
 - PREFORMANCE: RETURN LOSS OF -20dB MAX FREQUENCY RANGE DC -1.5 GHz
 - MECHANICAL:
 - TOTAL MATING FORCE: 500 GRAMS FOR 6 WIRES LEAD
 - RETENTION; 17 LBS BETWEEN JACK AND PLUG
 - CRIMP TENSILE STRENGTH: 4.0-500 LBS
- F-TYPE FEMALE TO FEMALE CONNECTOR:
 - MECHANICAL:
 - MATERIAL: BRONZE WITH 3 MICRON GOLD PLATING
 - HOLDING FORCE > 80 GRAMS
 - F-TYPE CONNECTOR THREADS: 3/8-32 UNEF-2A
 - ELECTRICAL:
 - RETURN LOSS OF -20dB -1.5GHZ
 - CONTACT RESISTANCE < 10 MOHM
 - INSULATION RESISTANCE > 5000 MOHM
 - INSERTION LOSS < 0.3dB



WIRING DIAGRAM

JACK POSITION	WIRE COLOR
1	WHITE
2	BLACK
3	RED
4	GREEN
5	YELLOW
6	BLUE