


3 RCA & 1 F-Type Decorex Insert

PRODUCT SPECIFICATION

Package includes:

- A. 3 RCA & 1 F-Type Decorex Insert, 1 pc
- B. #6-32 x 3/4" Pan Head Machine Screw, 2 pcs

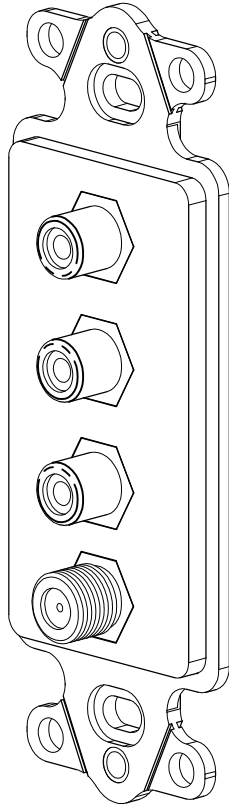

3 RCA & 1 F-Type Decorex Insert

Features and Benefits:

- Gold plating for optimum connection quality and exceptional performance
- Designed to be used for several types of media including audio-video, cable, satellite, or antenna input
- High definition red, green, and blue RCA component video output
- F-Type connector for coaxial video input
- Rear threaded F-Type connector for secure in-wall connections
- Ideal for home theaters and HDTV systems
- Fits standard NEMA electrical boxes
- Provides a professional finished look
- Compatible with all IC107 Decorex faceplates
- Available in ivory and white
- ANSI/TIA-568-C and UL 1863 compliant


INSERT, DECOREX, 3 RCA & 1 F-TYPE

ITEM NO.	ICRDS3RFXX
DWG NO.	PSRDS3RF00

REV.	A
PAGE NO.	1



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 2100 E. Valencia Dr, Suite D, Fullerton, CA 92831 * www.icc.com

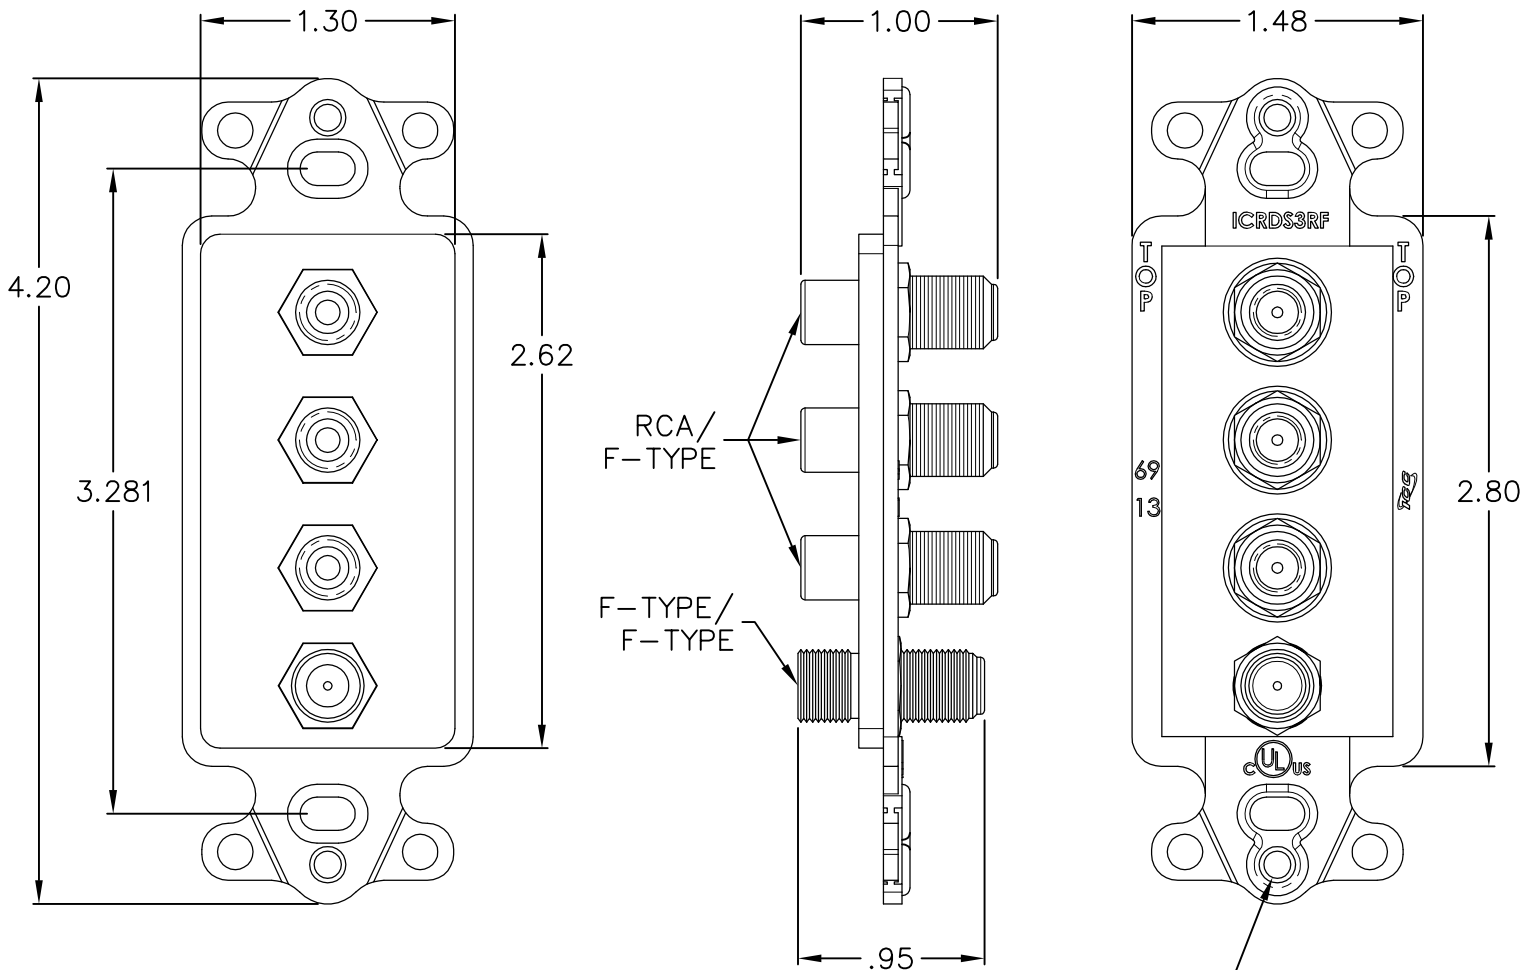

2X #6-32 THREADED
BRASS INSERT

NOTE: UNLESS OTHERWISE SPECIFIED

1. HOUSING:

- A. MATERIAL: ABS, UL 94V-0
- B. FINISH: GLOSSY
- C. COLOR: XX: IV-IVORY & WH-WHITE

2. RCA FEMALE-TO-F-TYPE FEMALE CONNECTOR & F-TYPE FEMALE-TO-FEMALE CONNECTOR:

- A. MATERIAL: BRONZE WITH 3 MICRON GOLD PLATING
- B. HOLDING FORCE > 80 GRAMS
- C. F-TYPE CONNECTOR THREADS: 3/8-32 UNEF-2A
- D. RCA INSULATOR COLOR: RED, GREEN, & BLUE

3. ELECTRICAL:

- A. RETURN LOSS OF -20 dB MAX
- B. FREQUENCY RANGE DC -1.5 GHZ
- C. CONTACT RESISTANCE < 10 MOHMS
- D. INSULATION RESISTANCE > 5000 MEGAOHM
- E. INSERTION LOSS < 0.3 dB

UL US FILE NO. 125268

INSERT, DECOREX, 3 RCA & 1 F-TYPE

ITEM NO. ICRDS3RFXX
DWG NO. PSRDS3RF00

REV. A
PAGE NO. 2



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 2100 E. Valencia Dr, Suite D, Fullerton, CA 92831 * www.icc.com