

MTP-MTP 10G 50/125µm OM3 Type B MM Fiber Optic Jumper



Package Includes:

- A. MTP-MTP 10G 50/125µm MM Fiber jumper, 1 Piece

Features and Benefits

- Made from OM3 fiber, compatible with any MTP cassettes & other MTP modules
- Type B polarity, 1 to 12 wiring
- Laser optimized fiber optic cable designed for 10 GHz applications
- Made with Corning® ClearCurve® glass, Bend-insensitive multimode fiber (BIMMF)
- Used with ICC fiber optic products
- Available in 5, 10, 15 & 20 meters
- Dust Cap included
- Plenum rated
- 100% factory tested
- Used with ICFC fiber cassette series

** ClearCurve® is a registered trademark of Corning®**

MTP® is a registered trademark of US Conec Ltd


Part No: ICFOJARGXX

Rev: A

Page 1 of 2

icc.com | cs@icc.com



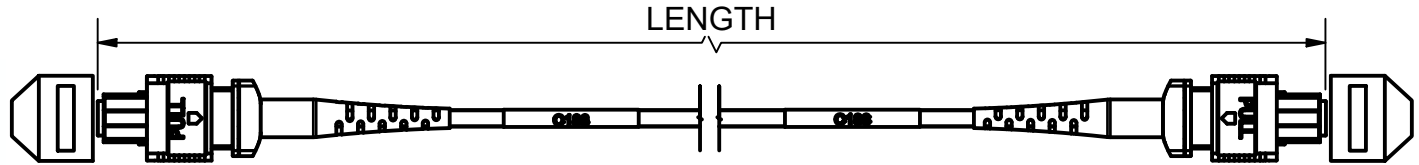

CONNECTOR PORT 1	CONNECTOR PORT 2	250 μm FIBER COLOR
1	12	BLUE
2	11	ORANGE
3	10	GREEN
4	9	BROWN
5	8	GREY
6	7	WHOTE
7	6	RED
8	5	BLACK
9	4	YELLOW
10	3	VIOLET
11	2	PINK
12	1	AQUA

ITEM NUMBER	LENGTH
ICFOJARG05	5 METER ± 10 CM
ICFOJARG10	10 METER ± 10 CM
ICFOJARG15	15 METER ± 10 CM
ICFOJARG20	20 METER ± 10 CM

NOTE: UNLESS OTHERWISE SPECIFIED

1. Cable:
 - A. Color: Aqua
 - B. Fiber Counts: 2 Fiber Zipcord
 - C. Fiber Type: Laser Optimized MM 50/125μm
 - D. Attenuation: 2.3/0.6 dB/km @ 850/1300 nm
 - E. Bandwidth: 2000 MHz.km EMB @ 850 nm
 - F. Cable Data:
 - Cable diameter: .079 in (2.0mm)
 - Weight: 12 lbs./kft
 - Bend radius: 1.2" MIN
 - Loading: 135 lbs. MAX
 - Impact cycle: 1500
2. MTP Connector:
 - A. Ferrule: ZirconiaS
 - B. Insertion Loss: 0.2 dB Typical, 0.3 dB MAX
 - C. Reflection: N/A
3. Compliance:
 - A. ANSI/TIA-568-C.3
4. Length XX: 05, 10, 15, 20 & meters

Part No: ICFOJARGXX

Rev: A

Page 2 of 2

icc.com | cs@icc.com

