


# Preterminated 66 Wiring Block w/8 RJ-11 Jacks 6P6C

## PRODUCT SPECIFICATION

### Package includes:

- A. 6P6C Prewired 66 Wiring Block, 1 pc
- B. 89D Mounting Bracket, 1 pc
- C. 66 Wiring Block Cover, 1 pc

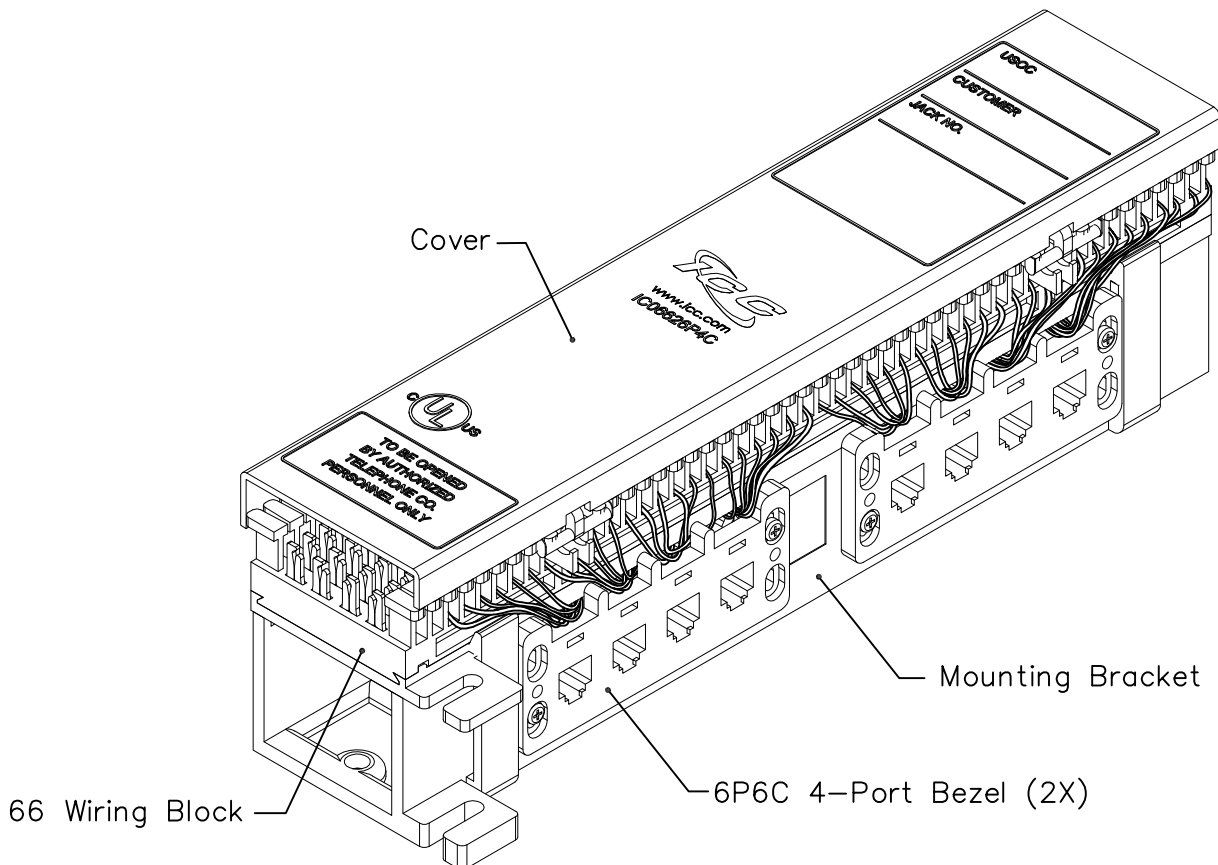

### Features and Benefits:

- Designed for voice, PBX systems, and low voltage telecom equipment.
- Durable and strong high impact flame retardant material.
- Includes 89D mounting bracket for wall mounting.
- Accommodates IC066BRCLP 66 wiring block bridging clips.
- Removable hinged cover.
- Accepts 22~24 AWG.





### 66 WIRING BLOCK, 8-JACKS, 6P6C

ITEM NO. IC06686P6C  
DWG NO. PS06686P6C

REV. A  
PAGE NO. 1



CUSTOMER CARE / TECHNICAL SUPPORT \* CSR@ICC.COM / 888-ASK-4-ICC (275-4422) \* 14700 Alondra Blvd., La Mirada, CA 90638 \* www.icc.com

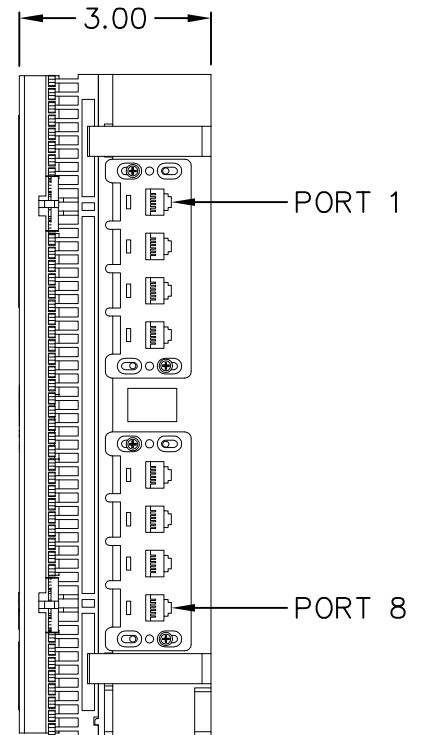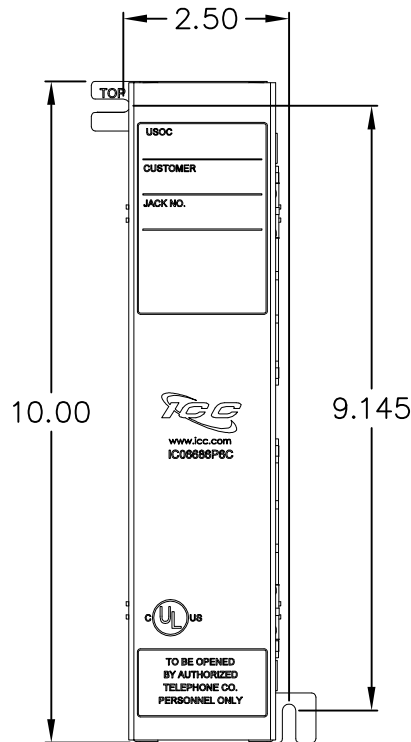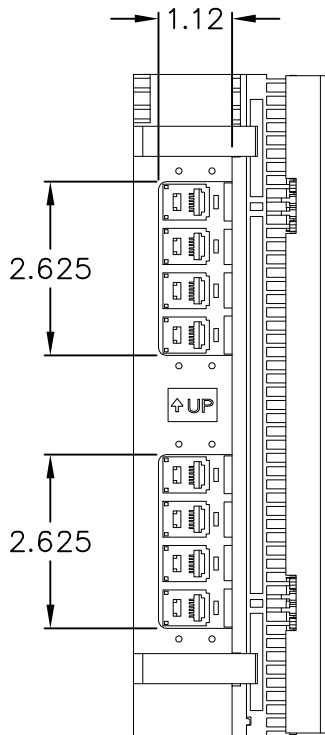

**NOTE: UNLESS OTHERWISE SPECIFIED**

**1. MATERIAL:**

- A. HOUSING: HIGH IMPACT FLAME RETARDANT PLASTIC, UL 94V0
- B. IDC: BRASS WITH 100 MICRO-INCH OF TIN
- C. SPRING WIRE: PHOSPHOR BRONZE ALLOY PLATED WITH 50 MICRO-INCH OF GOLD OVER 70~100 MICRO INCH OR NICKEL

**2. TEMPERATURE RANGE:**


- A. STORAGE: -40° TO +70°C
- B. OPERATION: -10° TO +60°C
- C. MAXIMUM NONCONDENSING: 93%

**3. ELECTRICAL:**


- A. ELECTRICAL INSULATION RESISTANCE: -500 MOHM MIN @ 100V DC
- B. DIELECTRIC WITHSTANDING VOLTAGE: -1000V RMS @ 60Hz FOR 1 MINUTE
- C. CONTACT RESISTANCE: 2.5 MOHMS MAX

**4. MECHANICAL:**

- A. RETENTION: 50N (11 LBF) FOR 60S ± 5S
- B. INSERTION/EXTRACTION LIFE: 750 CYCLES MINIMUM
- C. IDC WIRE GAUGE: 22~24 AWG

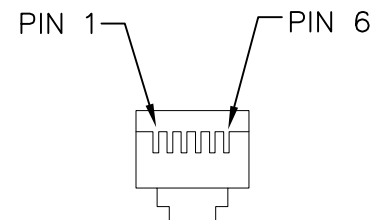

PIN	WIRE COLOR
1	WHITE
2	BLACK
3	RED
4	GREEN
5	YELLOW
6	BLUE

<b>66 WIRING BLOCK, 8-JACKS, 6P6C</b>		 <b>Premium Products</b> Proven Performance Competitive Prices	
ITEM NO.	IC06686P6C		REV. A
DWG NO.	PS06686P6C		PAGE NO. 2

CUSTOMER CARE / TECHNICAL SUPPORT \* CSR@ICC.COM / 888-ASK-4-ICC (275-4422) \* 14700 Alondra Blvd., La Mirada, CA 90638 \* www.icc.com